


KZS-AFDD 3M2p A B20/0.03

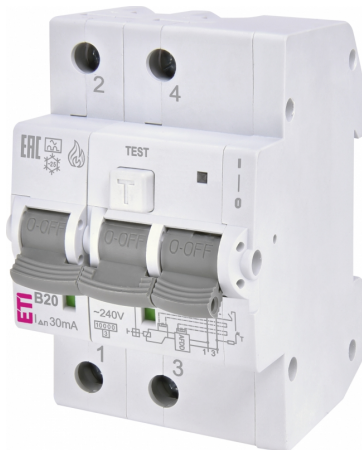

Specificatii

Cod ETI	002173815
Descriere	KZS-AFDD 3M2p A B20/0.03
Denumire clasă	Protectie defecte arc AFDD
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	B
Curent nominal (A)	20
Tip	A
Curent de defect nominal (A)	0.03
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	2
Frecvență nominală (Hz)	50Hz
Standarde	IEC/EN 61009-1, IEC/EN 62606
Secțiune transversală nominală	1-25

[Pagina de produse online](#)


Alta documentatie

[Catalog caracteristici tehnice](#)[Model 3D](#)[Manual de instructiuni](#)[Declaratie CE](#)[Eplan mușchi](#)


ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated impulse withstand voltage U _{imp}	4kV
Rated current	20A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Frequency	50 Hz
Release characteristic	B
Ambient temperature during operating	-25...40°C
Width in number of modular spacings	3
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm ²
Connectable conductor cross section multi-wired	1...25mm ²



Caracteristicile energiei de topire

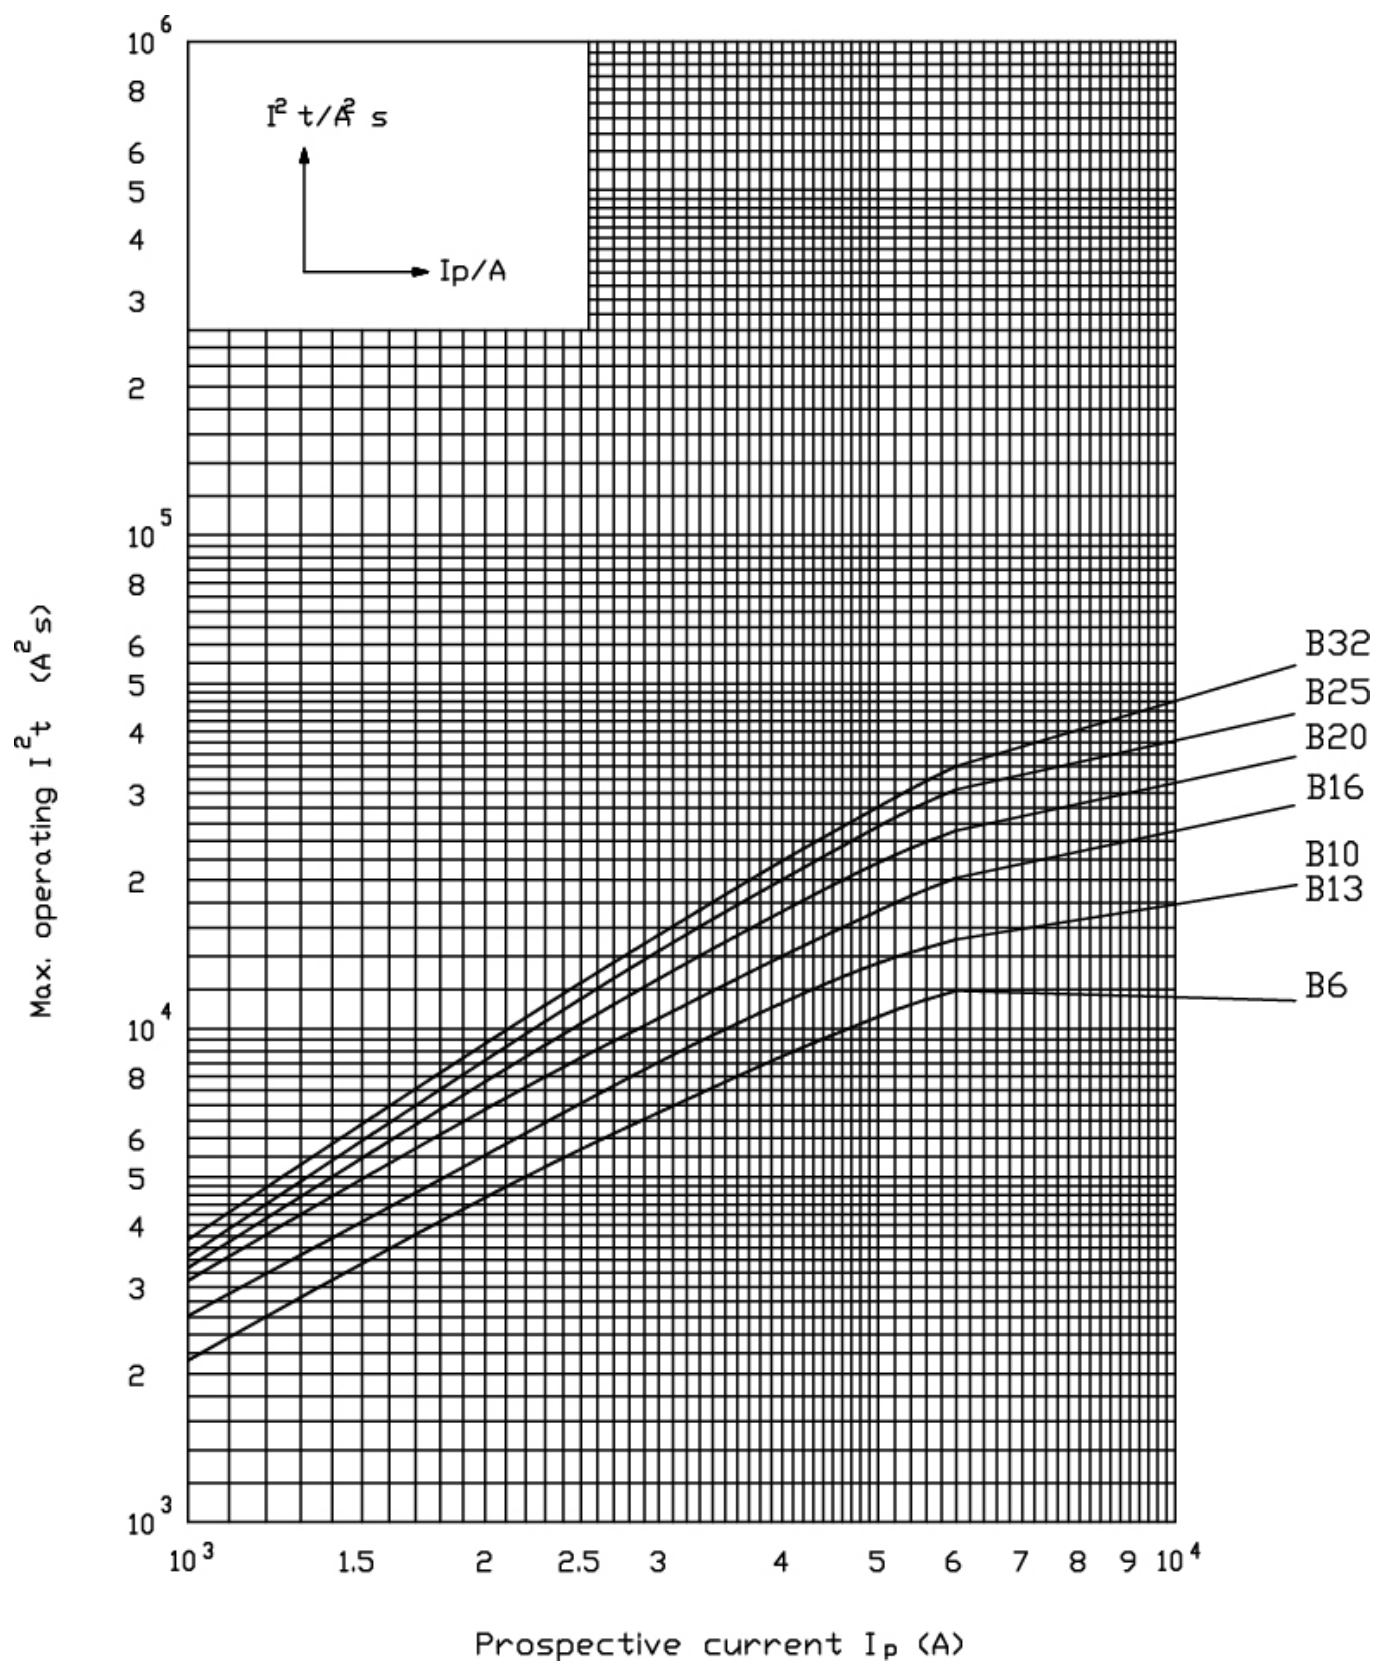

Caracteristici

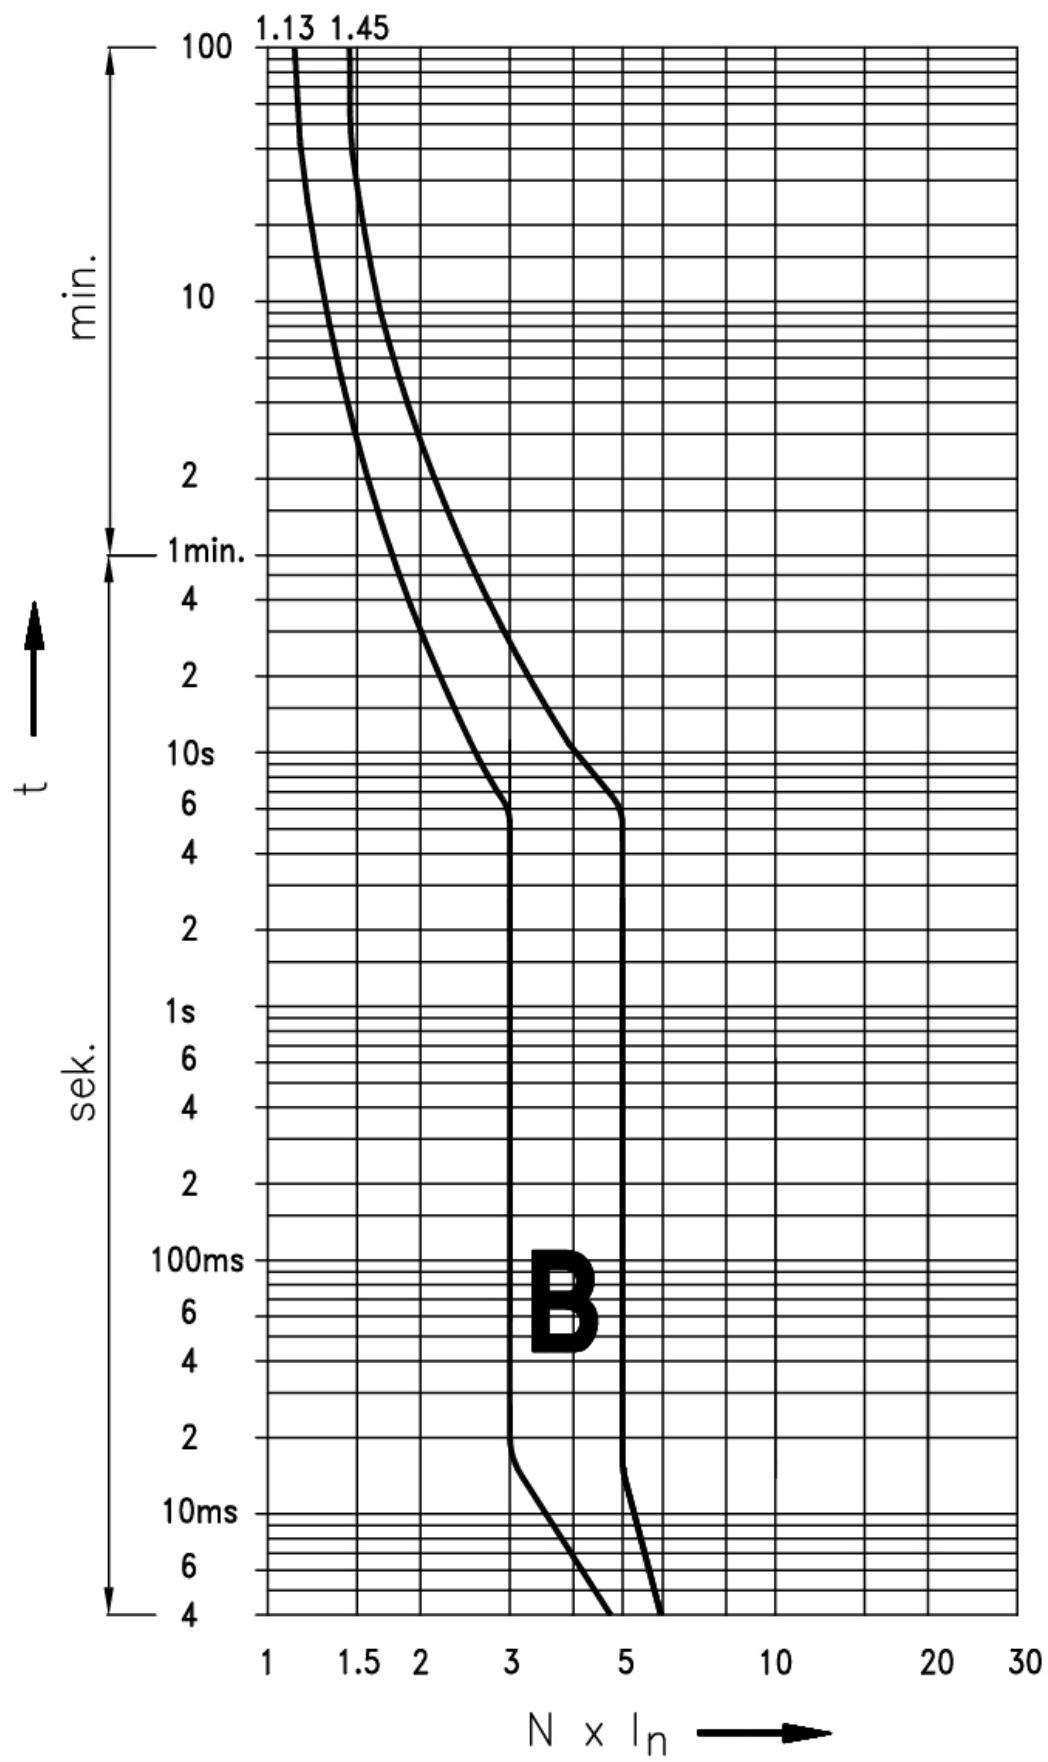

Desen cotat

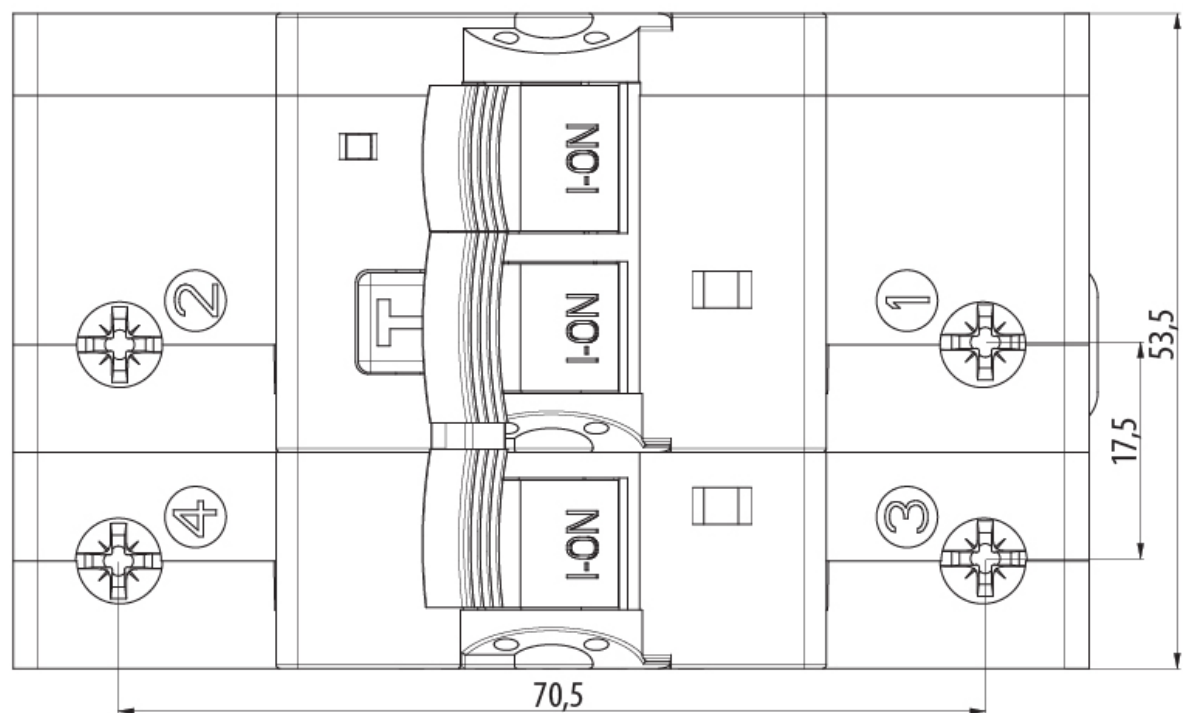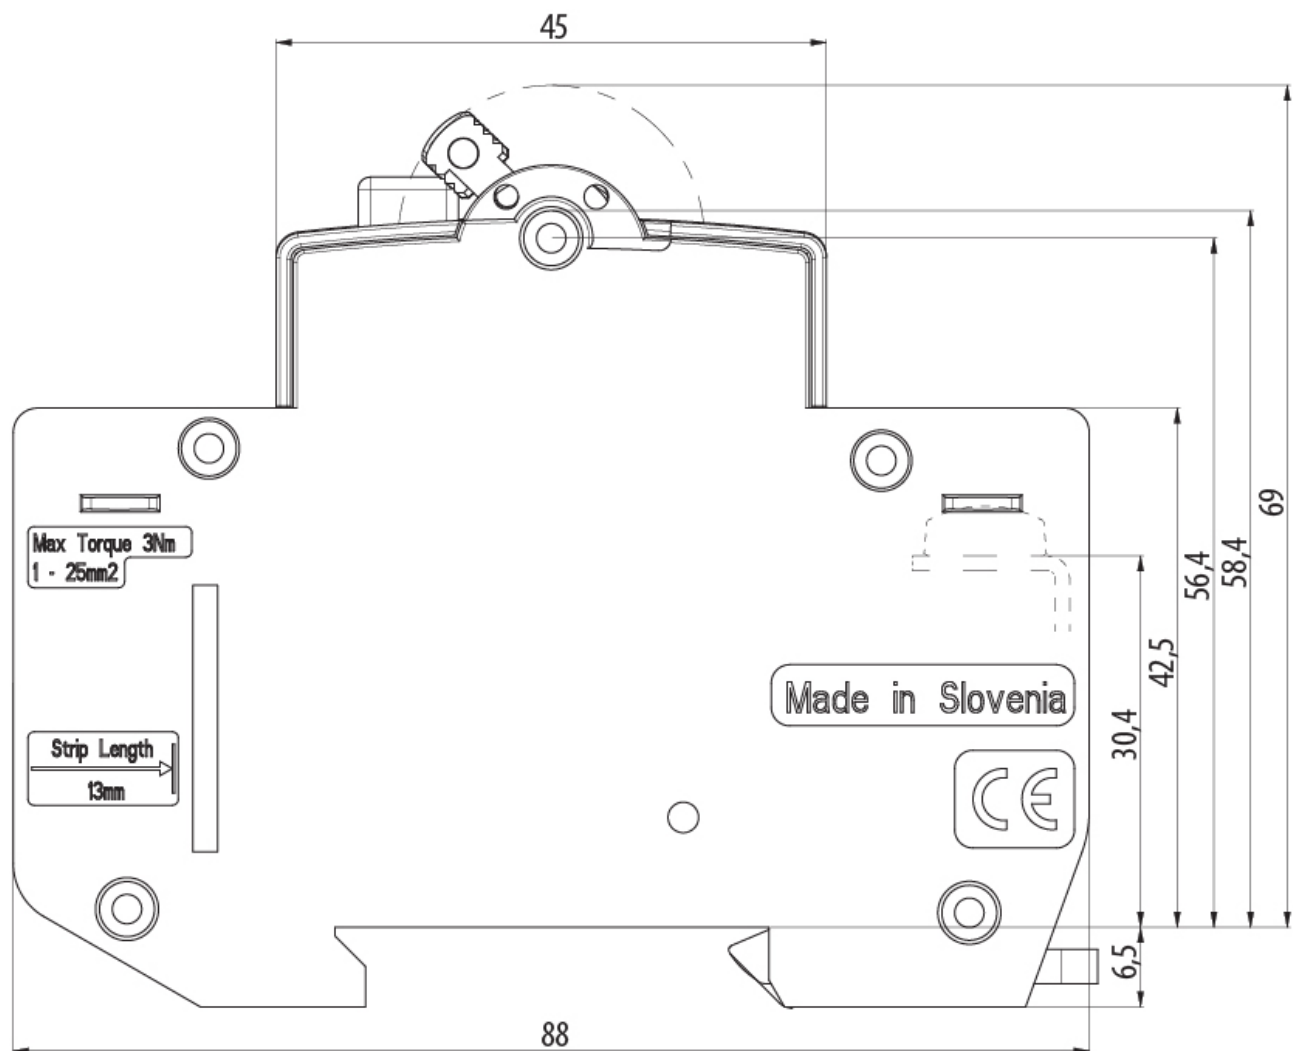

Simbol/Conexiune

