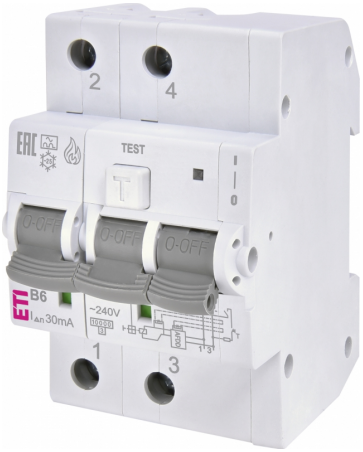
KZS-AFDD 3M2p A B6/0.03



Specificatii

Cod ETI	002173811
Descriere	KZS-AFDD 3M2p A B6/0.03
Denumire clasă	Protectie defecte arc AFDD
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	B
Curent nominal (A)	6
Tip	A
Curent de defect nominal (A)	0.03
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	2
Frecven ă nominală (Hz)	50Hz
Standarde	IEC/EN 61009-1, IEC/EN 62606
Sec iune transversală nominală	1-25

Pagina de produse online

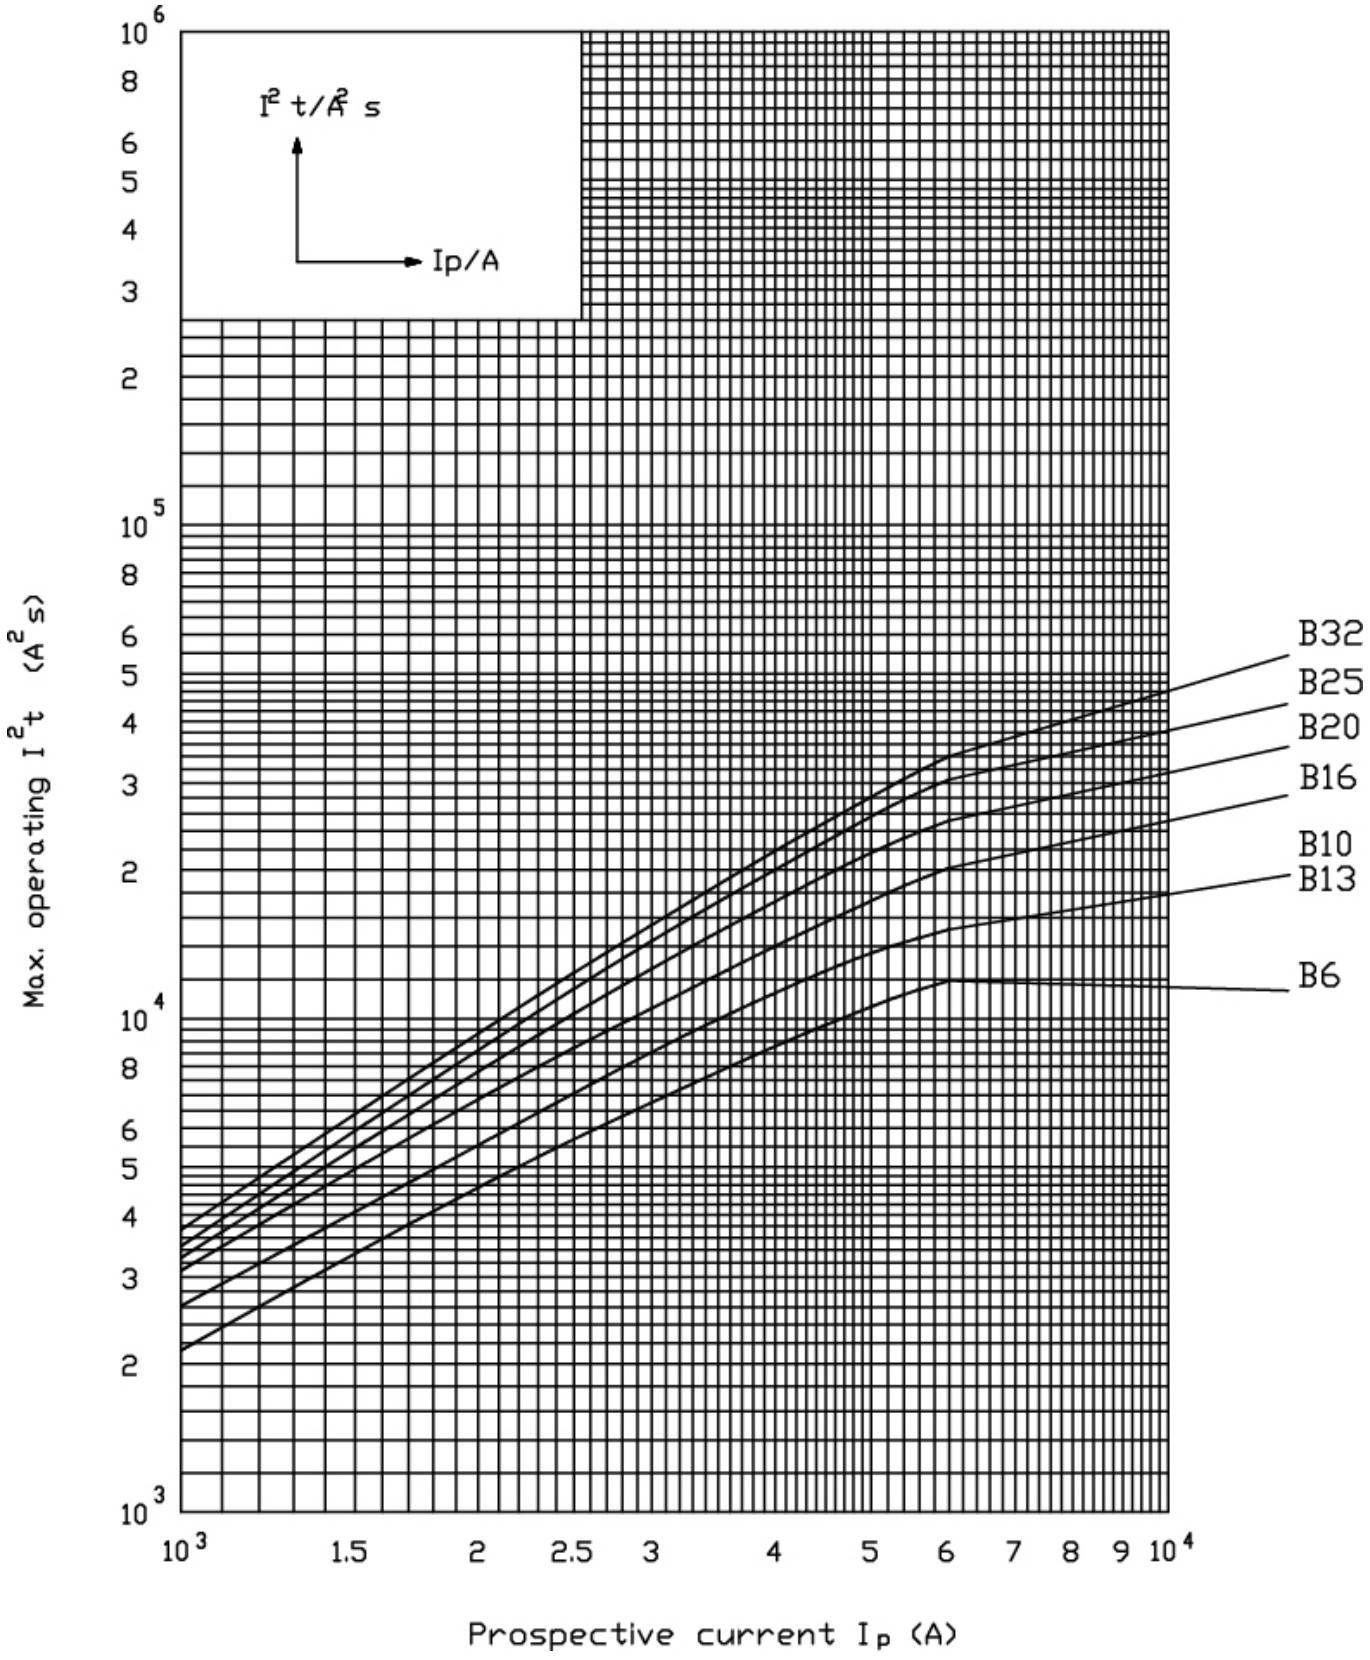
Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
Eplan mușchi

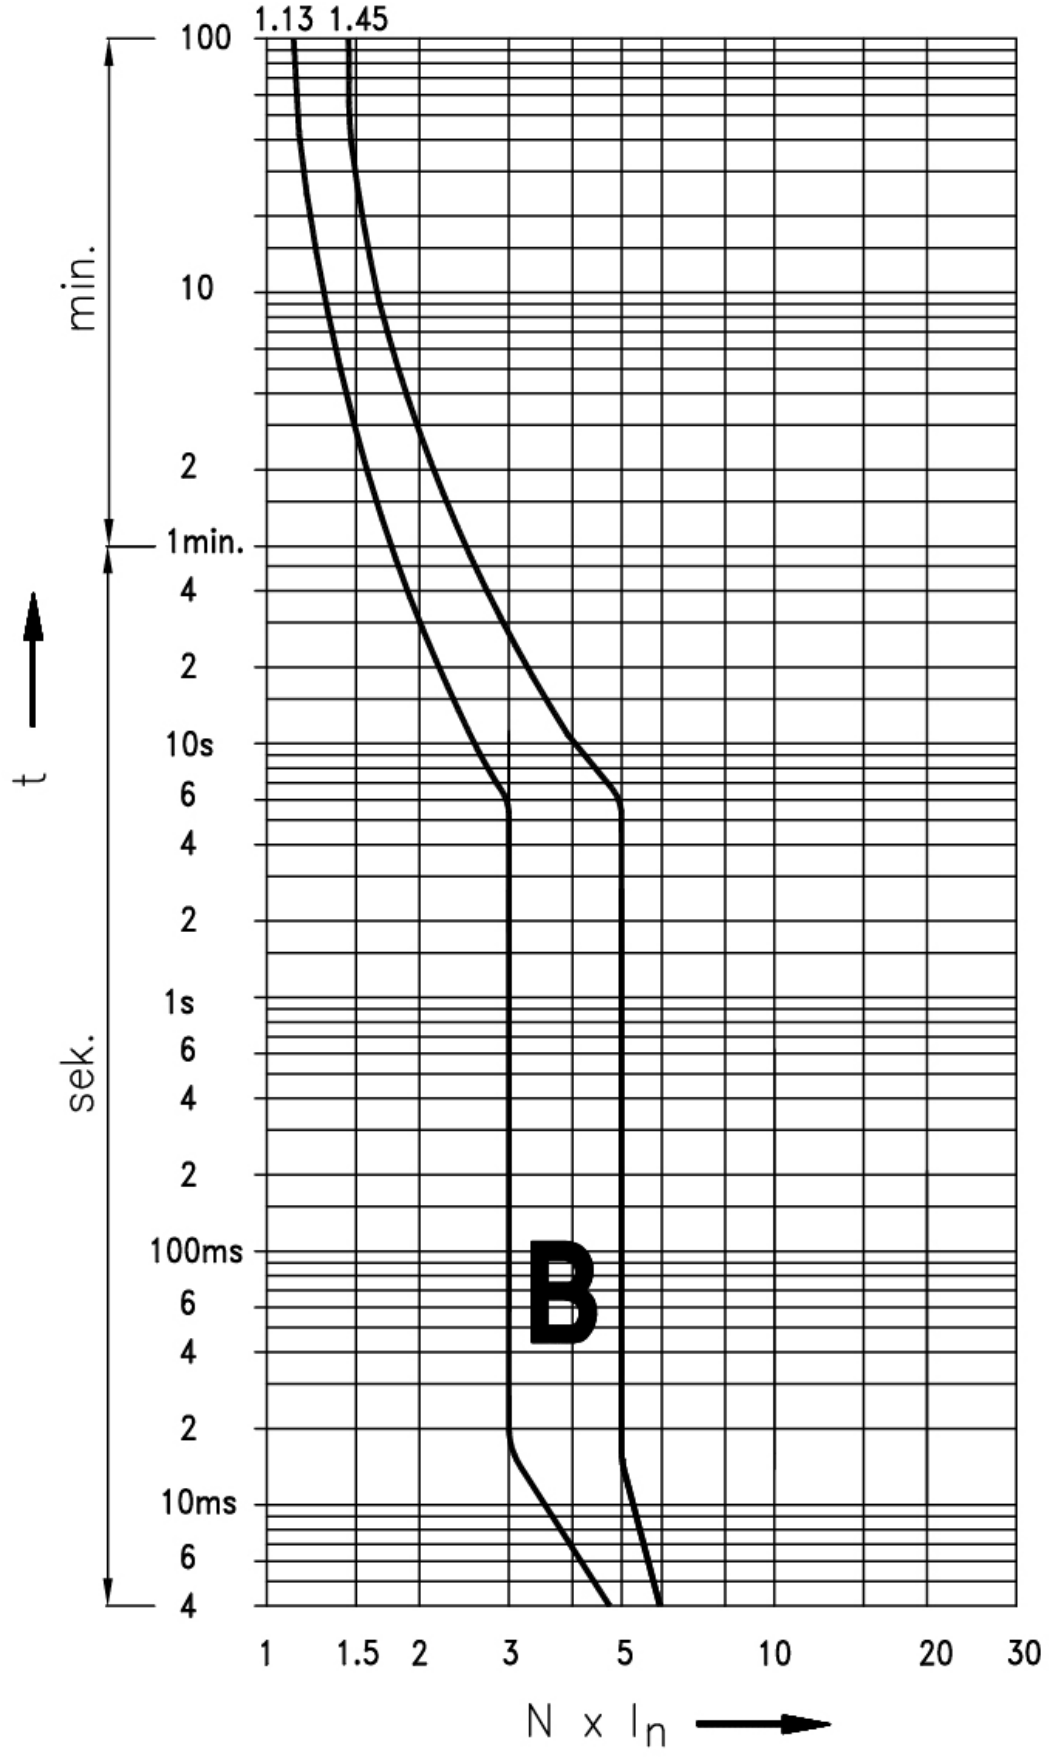
ETIM clasificare internationala

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated impulse withstand voltage Uimp	4kV
Rated current	6A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Frequency	50 Hz
Release characteristic	B
Ambient temperature during operating	-25...40°C
Width in number of modular spacings	3
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm²
Connectable conductor cross section multi-wired	1...25mm²

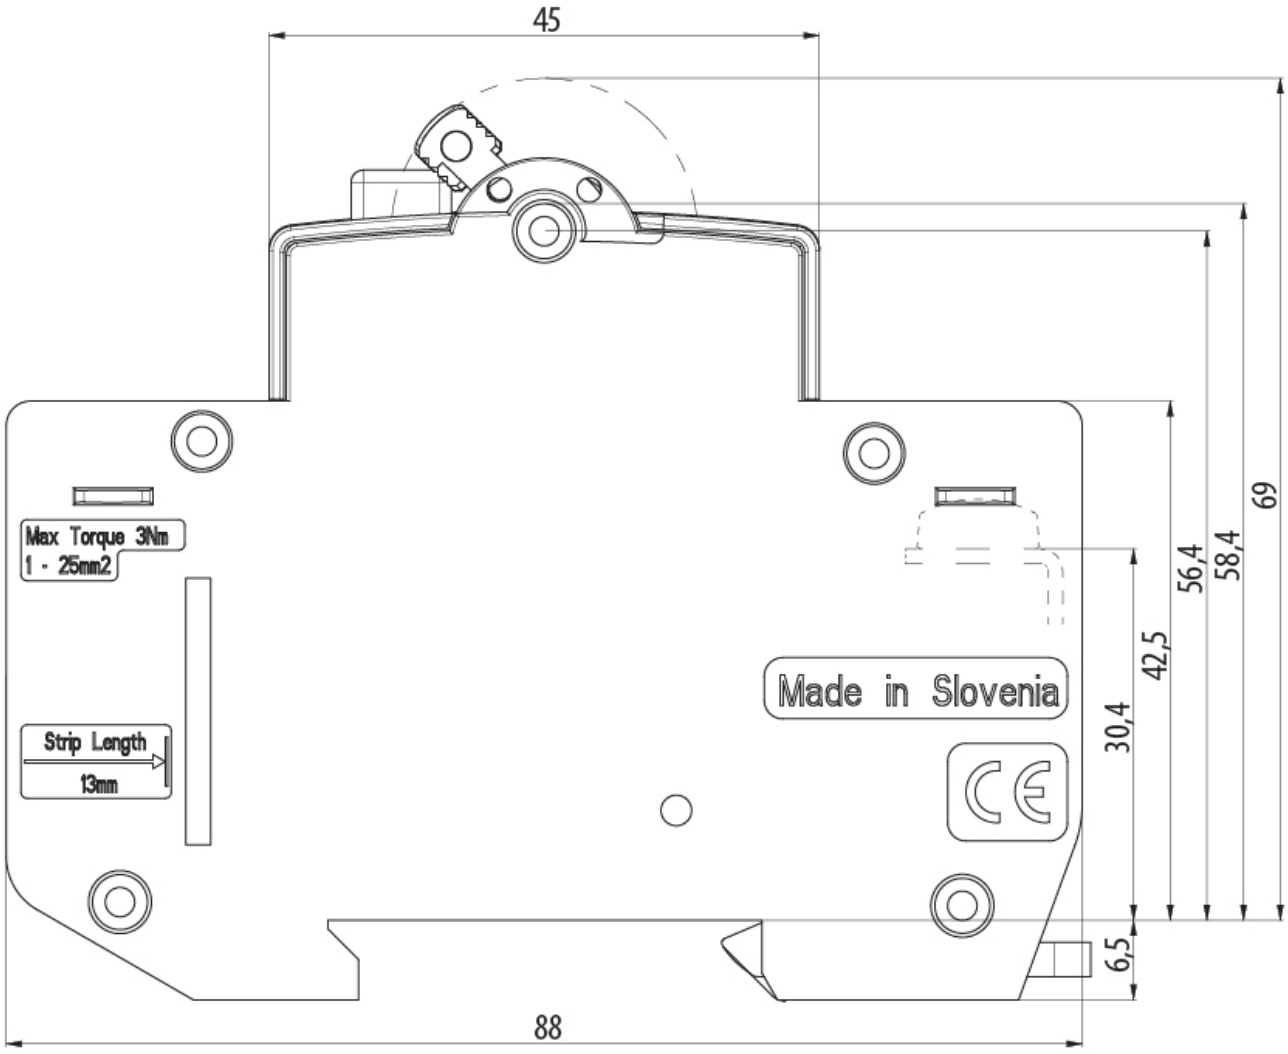
Caracteristicile energiei de topire

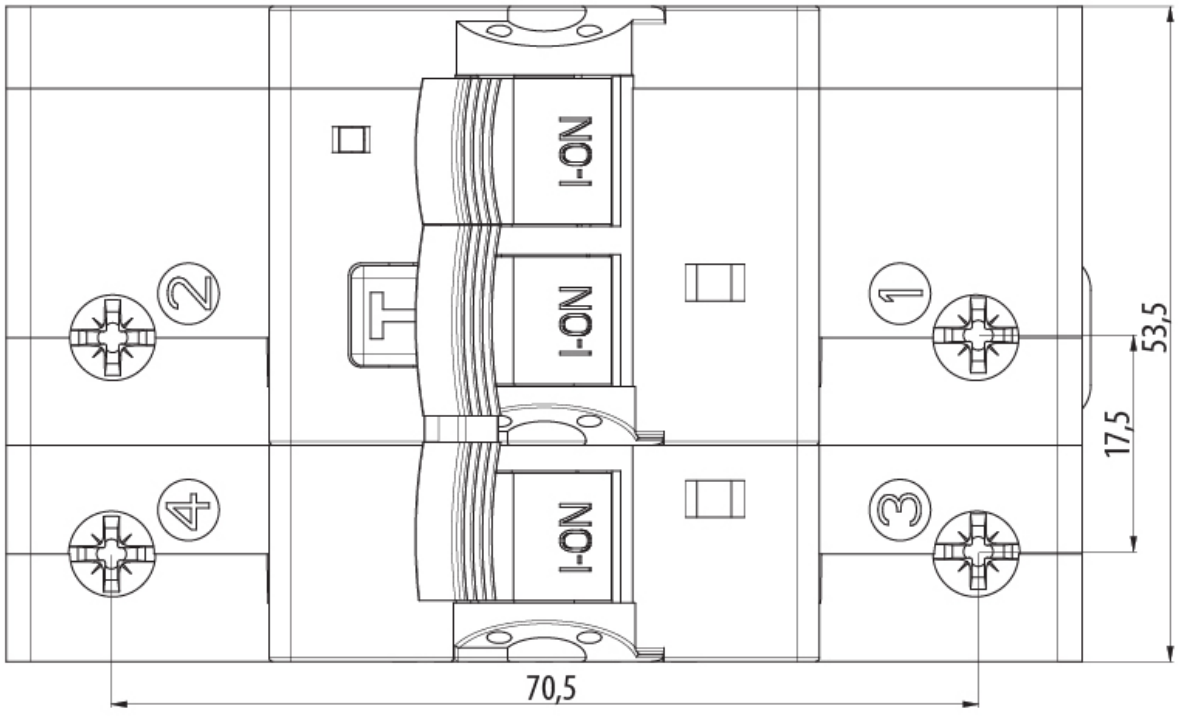


Caracteristici


1.13
1.45
100
10
2
1min.
4
2
10s
6
4
2
1s
6
4
2
100ms
6
4
2
10ms
6
4
min.
sek.
t
B
1
1.5
2
3
5
10
20
30
N x In

Desen cotat


45
Max Torque 3Nm
1 - 25mm2
Strip Length
13mm
Made in Slovenia
69
58,4
56,4
42,5
30,4
6,5
88


I-ON
I-ON
I-ON
1
2
3
4
53,5
17,5
70,5

Simbol/Conexiune

