

ETITEC C T2 275/20 2+0



Specificatii

Cod ETI	002440397
Descriere	ETITEC C T2 275/20 2+0
Denumire clasă	Protec ie supratensiuni
Func ie	SPD
Tip	T2
Imax(8/20) [kA]	40
Semnalare la distan ă	NU
Sistem re ea	TN-S
Grup Catalog	ETITEC C
In (8/20)	20
Numarul de module	2
Parte superioara - Nivel de protectie a tensiunii (kV)	1,5
Curent de scurgere	DA
Tehnologie aplicata	MOV
Adancime incorporata (mm)	66
AC max continous operating voltage Uc	275

Pagina de produse online [🔗](#)

Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi


ETIM clasificare internationala

Clasificare	EC000941
Denumire clasă	Surge protection device for power supply systems
System configuration DC	
System configuration IT	
System configuration TN-C	
System configuration TN-S	1
System configuration TT	
System configuration other	
Number of conductors (without earthing)	2
Nominal discharge surge current (8/20)	20
Nominal voltage AC	230
Short-circuit breaking capacity (I _{sc} cr)	25
Max. continuous voltage AC	275
Max. discharge surge current (8/20)	40
Mounting method	DIN rail (top hat rail) 35 mm
Construction size	2 modular spacing
Voltage protection level	1,5
Max. conductor cross section solid (solid, stranded)	35
Max. conductor cross section flexible (fine-strand)	25
With remote signalling contact	
Integrated backup fuse	
Signalling at the device	Optical
Category type 2	1
Degree of protection (IP)	IP20


Desen cotat

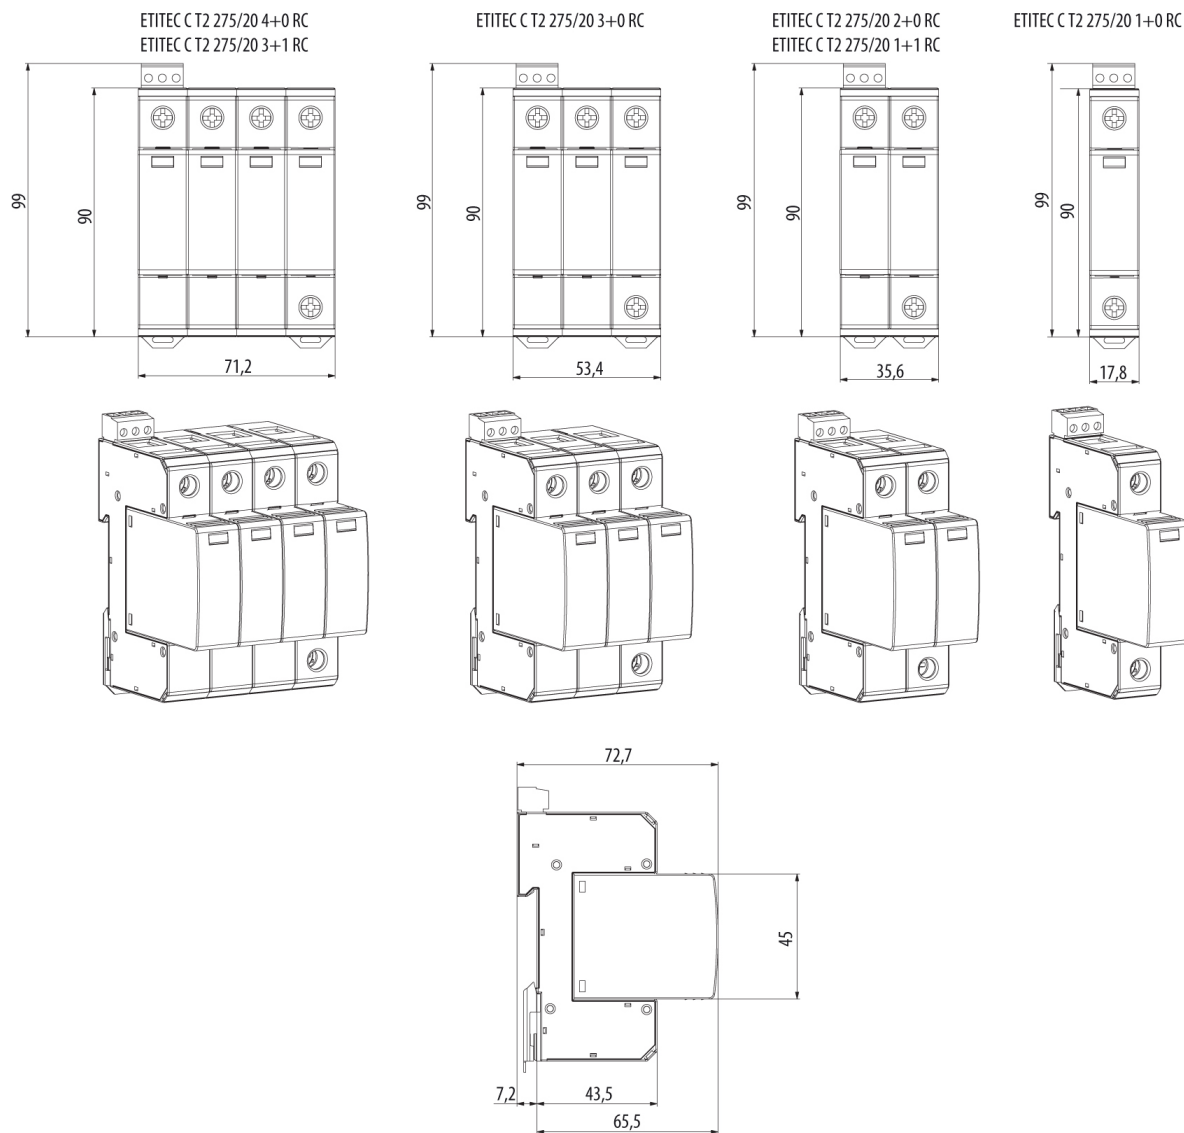


Simbol/Conexiune




ETITEC CT2 G




ETITEC CT2 1+0 RC




ETITEC CT2 1+1 RC




ETITEC CT2 2+0 RC

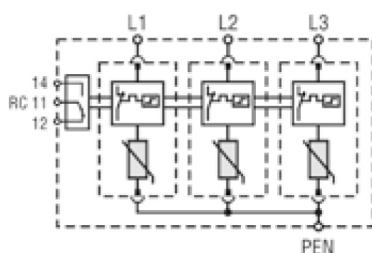

ETITEC CT2 3+0 RC

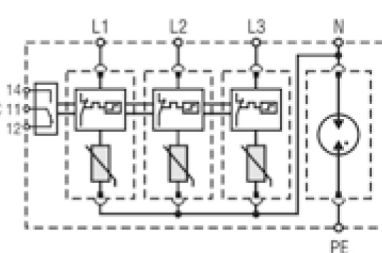

ETITEC CT2 3+1 RC

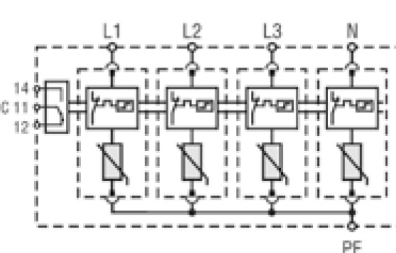

ETITEC CT2 4+0 RC