

ETITEC V T2 255/20 2+0



Specificatii

Cod ETI	002442953
Descriere	ETITEC V T2 255/20 2+0
Denumire clasă	Protec ie supratensiuni
Func ie	SPD
Tip	T2
Imax(8/20) [kA]	40
Semnalare la distan ă	NU
Sistem re ea	TN-S
Grup Catalog	ETITEC V
In (8/20)	20
Numarul de module	2
Parte superioara - Nivel de protectie a tensiunii (kV)	1,5
Curent de scurgere	DA
Tehnologie aplicata	MOV
Adancime incorporata (mm)	68
AC max continous operating voltage Uc	255

[Pagina de produse online](#)


Alta documentatie

[Catalog caracteristici tehnice](#)[Model 3D](#)[Manual de instructiuni](#)[Declaratie CE](#)[Eplan mușchi](#)


ETIM clasificare internationala

Clasificare	EC000941
Denumire clasă	Surge protection device for power supply systems
System configuration DC	
System configuration IT	
System configuration TN-C	
System configuration TN-S	1
System configuration TT	
System configuration other	
Nominal discharge surge current (8/20)	20kA
Nominal voltage AC	230V
Short-circuit breaking capacity (I _{sc} cr)	25kA
Max. continuous voltage AC	255V
Max. discharge surge current (8/20)	40kA
Mounting method	DIN rail (top hat rail) 35 mm
Max. conductor cross section solid (solid, stranded)	35mm ²
Max. conductor cross section flexible (fine-strand)	25mm ²
With remote signalling contact	
Integrated backup fuse	
Signalling at the device	Optical
Category type 2	1
Degree of protection (IP)	IP20

Desen cotat

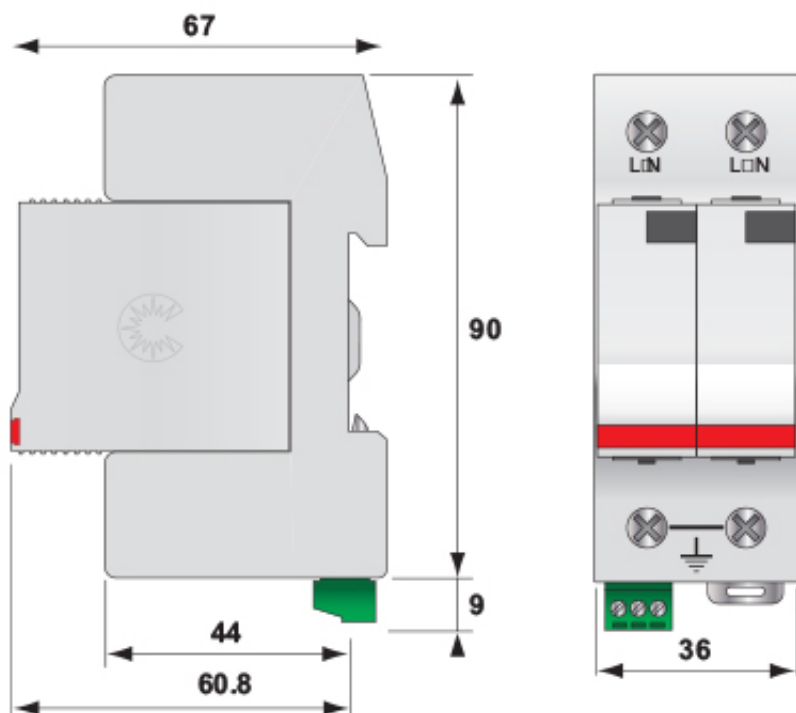

Simbol/Conexiune

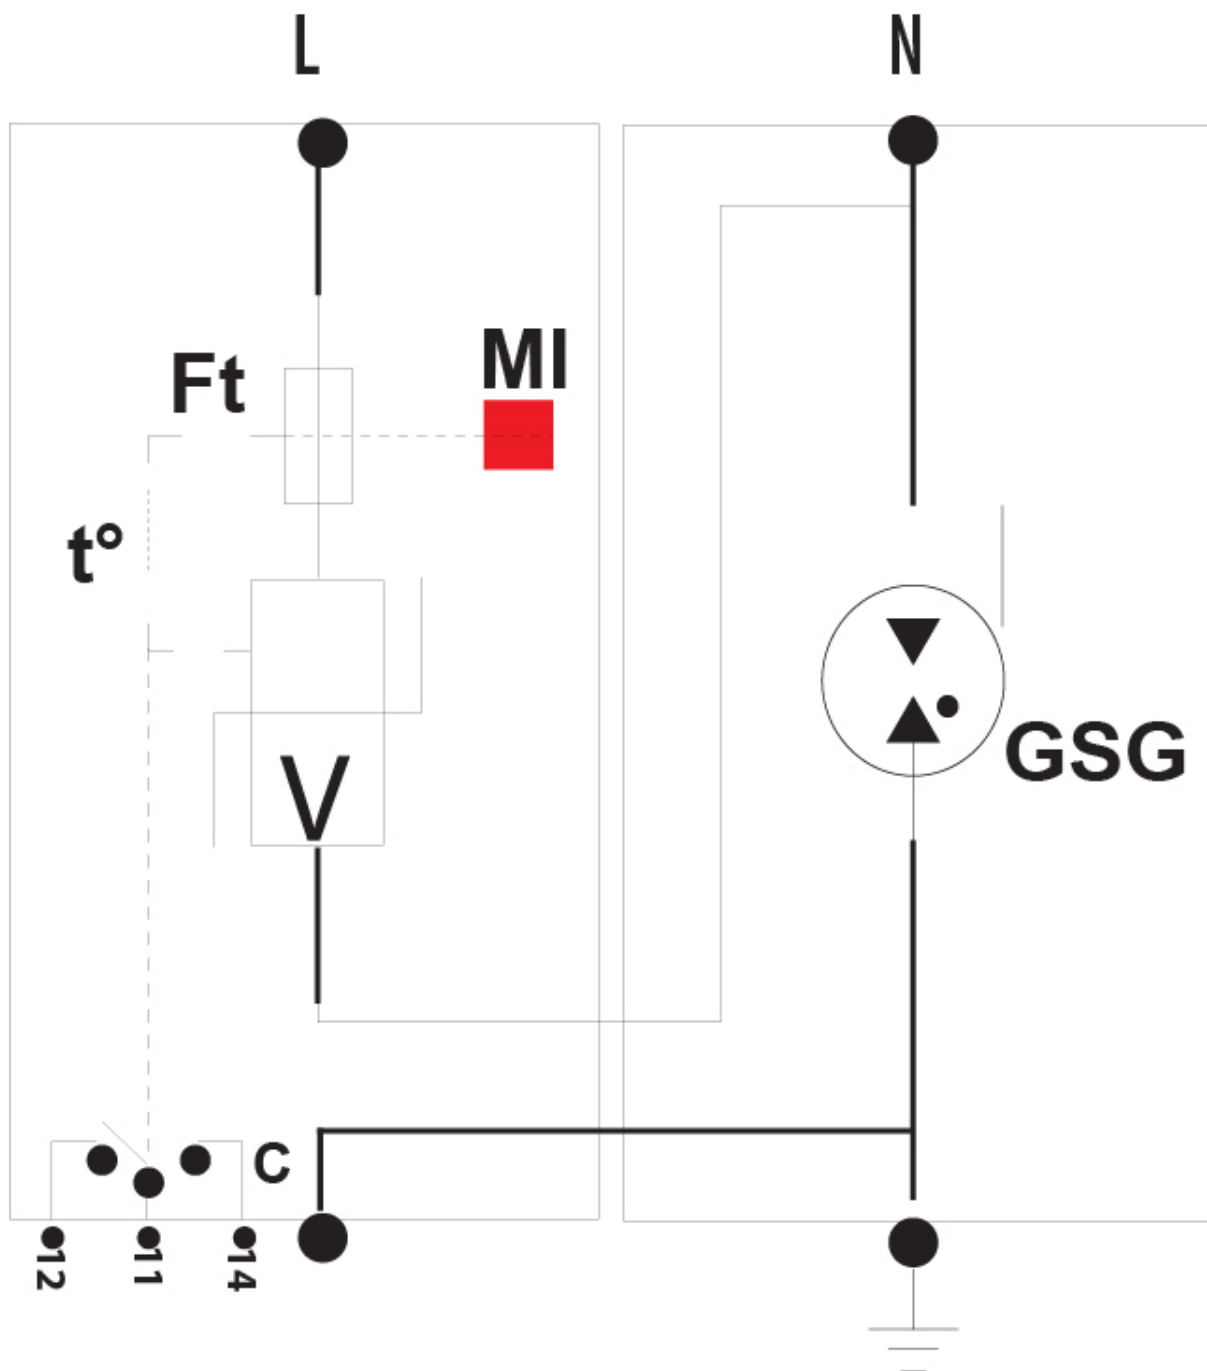

V: High-energy varistor

GSG: Specific gas tube

Ft: Thermal fuse

C: Remote signaling contact

t°: Thermal disconnection system

Mi: Disconnection indicator

