

ETIMAT P10 3p C16

Disjunctor miniatural



Cod ETI:	001901330
Aplicație:	EN/IEC 60898
Curent nominal:	16 A
Caracteristică de întrerupere:	C
Număr de poli:	3
Capacitatea de rupere:	10 kA
Tipul voltajului :	AC
Tensiunea nominală de rezistență Uimp:	6 kV
Tensiune nominală AC:	415 V
Frecvență nominală:	50/60 Hz
Secțiune transversală nominală:	1-25 mm ²
Standarde:	EN/IEC 60898
Funcție:	MCB

Pagina online a produsului [🔗](#)

Documente



CATALOG DATE TEHNICE



DECLARAȚIE CE



FIȘIER 2D



FIȘIER 3D



FIȘIER EPLAN

ETIM

Additional equipment possible	✓
Rated insulation voltage Ui	500 V
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	10 kA
Built-in depth	70 mm
Voltage type	AC
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	10 kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	10 kA
Rated impulse withstand voltage Uimp	6 kV
Degree of protection (IP)	IP20
Release characteristic	C
Over voltage category	3
Number of poles (total)	3
Pollution degree	2
Number of protected poles	3
Rated voltage	415 V
Current limiting class	3
Rated current	16 A
Flush-mounted installation	✓
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	10 kA
Width in number of modular spacings	3
Frequency(Min)	50 Hz
Ambient temperature during operating(Min)	-40 °C
Connectable conductor cross section solid-core(Min)	1 mm²
Connectable conductor cross section multi-wired(Min)	1 mm²
Connectable conductor cross section solid-core(Max)	25 mm²
Connectable conductor cross section multi-wired(Max)	25 mm²
Frequency(Max)	60
Ambient temperature during operating(Max)	70 °C

Logistică

Produs

EAN code for a single product	3838895925194
Greutate	285 g
Net width	53,4 mm
Net height	89 mm
Net depth	74,74 mm
Stock unit of measure	pcs



Ambalare de bază

Basic packaging quantity	4 pcs
EAN code for a basic packaging	3838895925200
Basic packaging weight	1,196 kg
Basic Packaging Dimensions Height	79 mm
Basic Packaging Dimensions Width	91 mm
Basic Packaging Dimensions Depth	220 mm
Basic packaging volume	1,582 dm³

Ambalare transport

Transport packaging quantity	36 pcs
EAN code for a transport packaging	3838895925217
Transport packaging weight	11,117 kg
Transport Packaging Dimensions Height	0,25 m
Transport Packaging Dimensions Width	0,235 m
Transport Packaging Dimensions Depth	0,295 m
Transport packaging volume	0,017 m³
Pallet quantity	1.872 pcs
Customs tariff	85362010

I/t characteristic

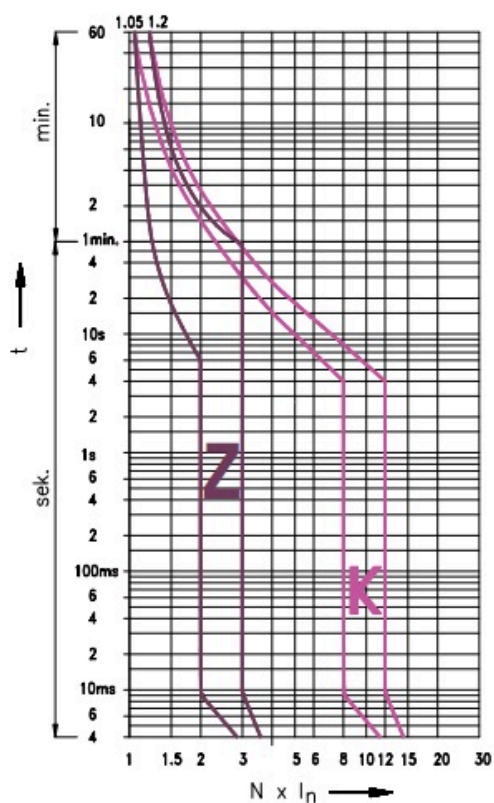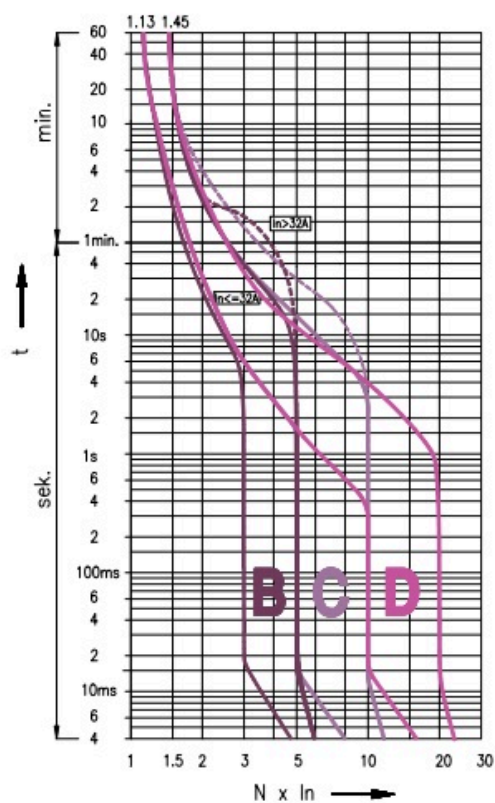

Symbol connection

1p




1p+n




2p




3p



3p+n



Dimension

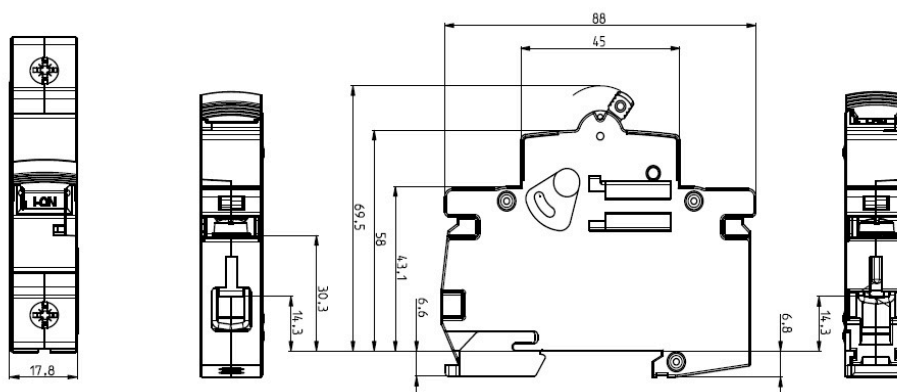

Energy characteristic

