ETIMAT P10 3p+N B32

Disjunctor miniatural



Cod ETI:	**001901413**
Aplicație:	**EN/IEC 60898**
Curent nominal:	**32 A**
Caracteristică de întrerupere:	**B**
Număr de poli:	**3+N**
Capacitatea de rupere:	**10 kA**
Tipul voltajului :	**AC**
Tensiunea nominala de rezistenta Uimp:	**6 kV**
Tensiune nominală AC:	**415 V**
Frecvență nominală:	**50/60 Hz**
Secțiune transversală nominală:	**1-25 mm²**
Standarde:	**EN/IEC 60898**
Funcție:	**MCB**

Pagina online a produsului

Documente

CATALOG DATE TEHNICE

DECLARAȚIE CE

FIȘIER 2D

FIȘIER 3D

FIȘIER EPLAN

ETIM

Additional equipment possible	✓
Rated insulation voltage Ui	**500 V**
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	**10 kA**
Built-in depth	**70 mm**
Voltage type	**AC**
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	**10 kA**
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	**10 kA**
Rated impulse withstand voltage Uimp	**6 kV**
Degree of protection (IP)	**IP20**
Release characteristic	**B**
Over voltage category	**3**
Number of poles (total)	**4**
Pollution degree	**2**
Concurrently switching neutral conductor	✓
Number of protected poles	**3**
Rated voltage	**415 V**
Current limiting class	**3**
Rated current	**32 A**
Flush-mounted installation	✓
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	**10 kA**
Width in number of modular spacings	**4**
Frequency(Min)	**50 Hz**
Ambient temperature during operating(Min)	**-40 °C**
Connectable conductor cross section solid-core(Min)	**1 mm²**
Connectable conductor cross section multi-wired(Min)	**1 mm²**
Connectable conductor cross section solid-core(Max)	**25 mm²**
Connectable conductor cross section multi-wired(Max)	**25 mm²**
Frequency(Max)	**60**
Ambient temperature during operating(Max)	**70 °C**

Logistică

Produs

EAN code for a single product	**3838895953784**
Greutate	**422 g**
Net width	**71,2 mm**
Net height	**89 mm**
Net depth	**74,74 mm**
Stock unit of measure	**pcs**


Ambalare de bază

Basic packaging quantity	**3 pcs**
EAN code for a basic packaging	**3838895953791**
Basic packaging weight	**1,322 kg**
Basic Packaging Dimensions Height	**79 mm**
Basic Packaging Dimensions Width	**91 mm**
Basic Packaging Dimensions Depth	**220 mm**
Basic packaging volume	**1,582 dm³**


Ambalare transport

Transport packaging quantity	**27 pcs**
EAN code for a transport packaging	**3838895953807**
Transport packaging weight	**12,251 kg**
Transport Packaging Dimensions Height	**0,25 m**
Transport Packaging Dimensions Width	**0,235 m**
Transport Packaging Dimensions Depth	**0,295 m**
Transport packaging volume	**0,017 m³**
Pallet quantity	**1.404 pcs**
Customs tariff	**85362010**


Dimension

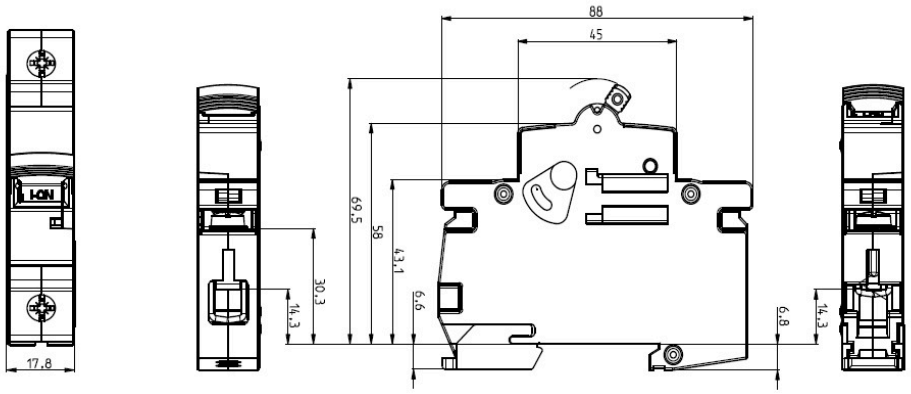


Energy characteristic

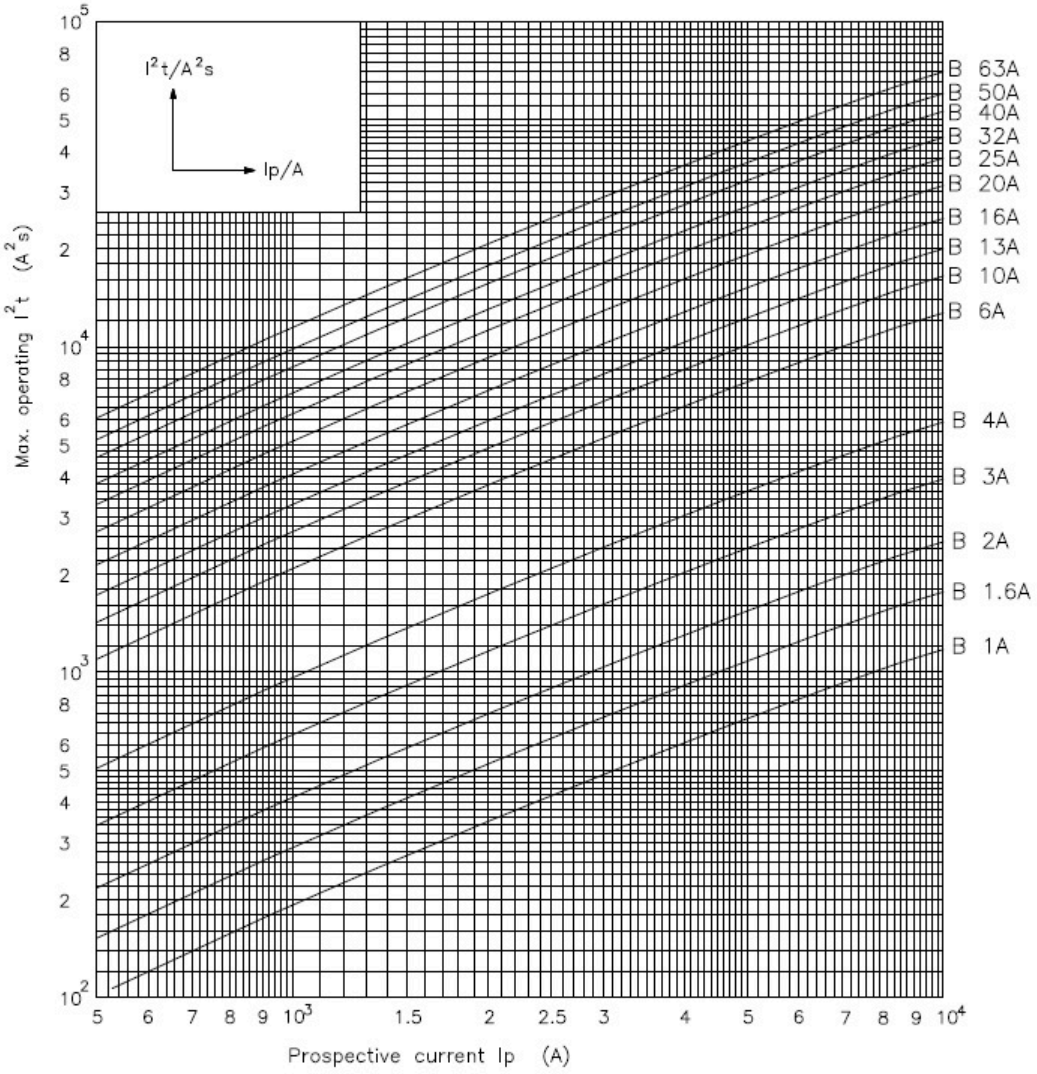

I/t characteristic

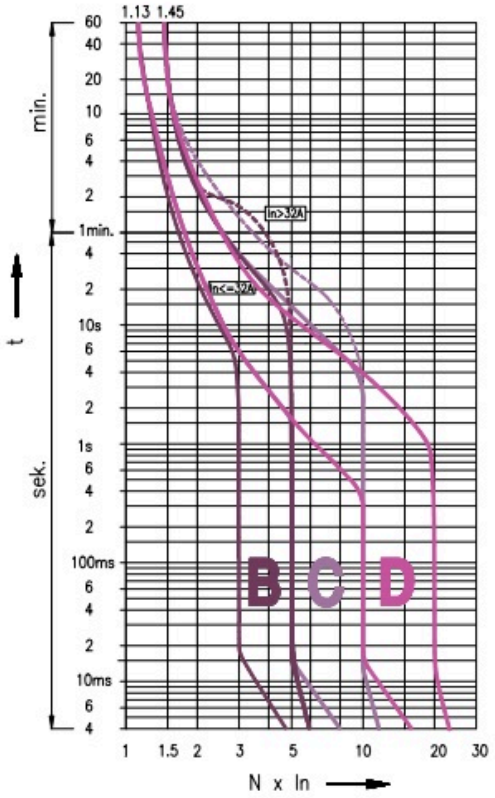

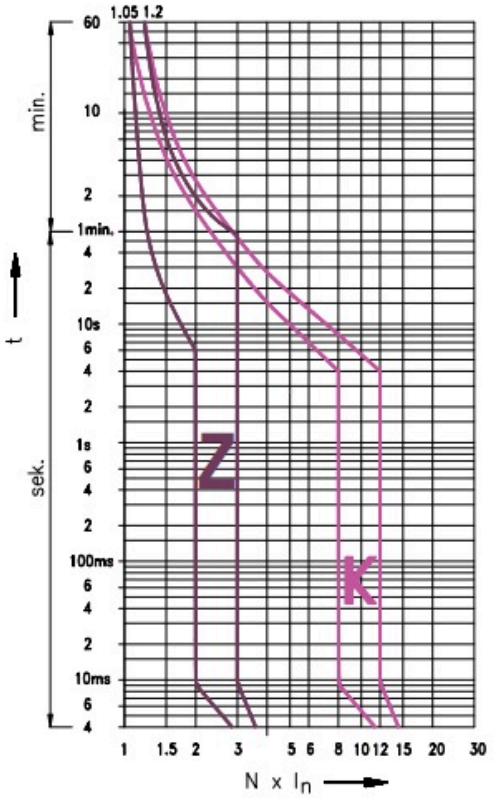

Symbol connection

